



OPTICAL INTERFEROMETRIC GAS ANALYSER

LEADERS IN GAS DETECTION

Since 1977

Model FI-900



Features:

- Uses an optical interferometric sensor with high reliability and backed with an 80-year track record
 - Gas analyser with refinements made to the optical interferometric sensor developed when our company was founded
 - Sensor with no degradation in sensitivity and excellent long-term stability means replacement is not required for 10 years
 - Takes measurements using gas-specific refractive indices, making it capable of measuring a wide range of gases
- Capable of detecting corrosive gases like methylene chloride, NH₃ and VCM gases
- Flameproof enclosure (ATEX/IECEx/Japan Ex) that can even be used in H₂ environment
- Comprehensive self-diagnostic function, and checks of gas concentrations as well as status using MODBUS communications
- Ideal for preventing explosions and monitoring concentrations of VOCs, and monitoring concentrations of hydrogen gas

Applications:

- Petroleum Refining
- Petrochemicals
- Hydrogen Production
- Foodstuff (e.g. breweries)
- Painting (e.g. automobile)
- Gravure Painting

The FI-900 is equipped with Long-term Stability Optical Interferometric Sensor Ideal for Controlling Gas Concentrations in Manufacturing Processes. Uses an optical interferometric sensor with high reliability and backed with an 80-year track record. Capable of detecting corrosive gases like methylene chloride, NH₃ and VCM gases. Flameproof enclosure (ATEX/IECEx/Japan Ex) that can even be used in H₂ environment. Comprehensive self-diagnostic function, and checks of gas concentrations as well as status using MODBUS communications. Ideal for preventing explosions and monitoring concentrations of VOCs, and monitoring concentrations of hydrogen gas.

ATEX (Equipment for explosive atmospheres) explosion-proof certified product. IECEx (IEC System for Certification to Standards Relating to Equipment for Use in Explosive Atmospheres) certified product. TIIS (Technology Institution of Industrial Safety) explosion-proof certified product. CE Marking conforming product.

Head Office:

Unit 1 / 3 Deakin Street
(PO Box 5904)
Brendale QLD 4500 Australia
Ph: +61 (0) 7 3481 9000


Perth Office:

Unit 5 / 30 Enterprise Crescent
Malaga WA 6090 Australia
Ph: +61 (0) 8 6184 7840
sales@controequipment.com.au

Representatives/Offices in:

Sydney Melbourne
Hobart Adelaide
Auckland Wellington
www.controequipment.com.au

Model	FI-900
Measuring principle	Optical interferometric method
Measuring gas	Combustible gases, solvent vapors, inert gases
Measuring range	Depending on gas specifications
Alarm setpoint	Depending on gas specifications
Measurement accuracy	F.S. within $\pm 3\%$ (under same conditions)
Response time	T90: within 30 seconds
Measurement method	Specified flow gas feed from external sampling unit
Display	Full-dot LCD (with backlight)
External output	4-20 mA DC (insulated, current throw type), permitted resistive load 300 Ω or less Minimum resolution 0.01 mA or less
Communications output	RS-485 (MODBUS) communication function
Alarm relay contact 1	Non-voltage contact, contact capacity 1 A 30 V DC (resistive load)
Alarm relay contact 2	Non-voltage contact, contact capacity 1 A 30 V DC (resistive load)
Malfunction contact	Non-voltage contact, contact capacity 1 A 30 V DC (resistive load)
Power supply	24V DC $\pm 10\%$ / 100 - 240V AC $\pm 10\%$ 50/60Hz *The ATEX/IECEx specifications apply to DC power source only
Power consumption	Max. 6 W (24 V DC $\pm 10\%$) / Max. 20 VA (100 - 240 V AC $\pm 10\%$ 50/60 Hz) *The ATEX/IECEx specifications apply to DC power source only
Protection class	Equivalent to IP66/67
Operating temperature range	-20 to +60°C (ATEX/IECEx specifications) / -20 to +57°C (Japan Ex specifications) (no sudden changes)
Operating humidity range	0 to 95% RH (no condensation/use of condensable gases within unit) (no condensation)
Operating pressure range	Atmospheric pressure or equivalent (no pulses)
Outer dimensions	Approx. 286 (W) x 453 (H) x 150 (D) mm (projection portions excluded)
Weight	Approx. 23 kg
Explosion-proof structure	Flame-proof enclosures
Explosion-proof class	II 2G Ex db II B+H2 T4 Gb (ATEX) / Ex db II B+H2 T4 Gb (IECEx) / Ex d II B+H2 T4 (Japan Ex)
Self-diagnostic function	Status monitoring in 4 separate categories •FAILURE •FUNCTION CHECK •MAINTENANCE REQUIRED •OUT OF SPECIFICATION
Accessories	Control key, Allen key (2 types), cable ground, plug

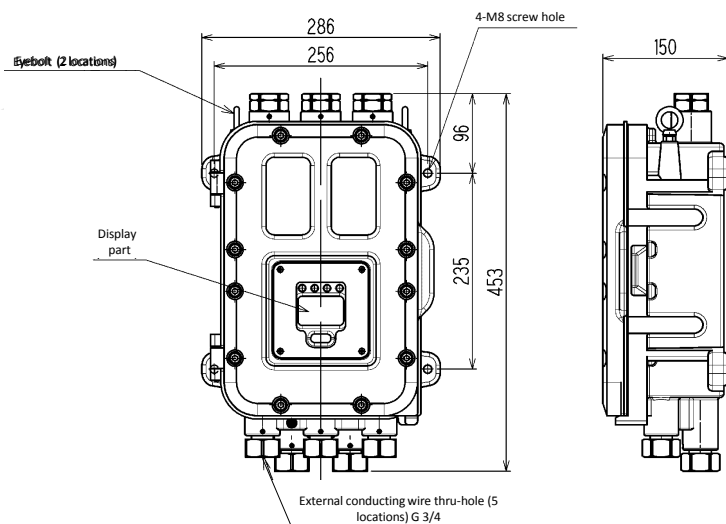

Gas specifications

Measuring gas	Measuring range	Measurement accuracy
Toluene in air	0—100%LEL	$\pm 3\%$ LEL
Acetone in air	0—100%LEL	$\pm 3\%$ LEL
Ethyl acetate in air	0—100%LEL	$\pm 3\%$ LEL
Methylene chloride in air	0—100%LEL	$\pm 3\%$ LEL
Methylene chloride in air	0—20vol%	$\pm 0.6\text{vol}\%$
Hydrogen in nitrogen	0—100%LEL	$\pm 3\%$ LEL
Hydrogen in nitrogen	0—100vol%	$\pm 0.6\text{vol}\%$

*1 Gas specifications are planned to be added to the lineup, however if you need the product to measuring gases, base gases, or measurement ranges not included in this list, please inquire with our Sales Department.

*2 In order for the device to be able to detect gases, a separate sampling unit is required for drawing in the measuring gas and reference gas.

