



# DIGITAL AIR FLOW METER

**LEADERS IN GAS DETECTION®**

Since 1977

## Flow Detective

### Features:

- High accuracy calibration
- Pulsation detection
- Simple operation
- Rugged design
- Long battery life
- Wide flow measurement
- Bluetooth connectivity
- Closed loop, wireless calibration with Apex2 pumps

### Dependable and Easy to Use

The Flow Detective™ has been designed to be rugged, with no moving parts so it can be used in the field. Performing calibrations is quick and easy, with a simple user interface and colour screen that can be easily viewed from a distance.

- Colour display
- Instant and average flow readings
- Selectable measurement units
- No warm up required
- Saves time compared to traditional calibration methods

The Flow Detective™ is an easy to use all-in-one airflow calibrator that is suitable for all types of air sampling pumps and other applications for flows up to 5L/min. It is a rugged, compact lab or field portable calibrator which removes the need to purchase multiple flowmeters. This minimises set up prior to undertaking calibrations, and saves on purchasing costs and valuable time to undertake pump calibrations.

The Flow Detective is designed with ruggedness and accuracy in mind. With Casella's world renowned ease of use, calibration of air sampling pumps just got quicker and easier. Use Airwave on your mobile device to connect remotely to the Flow Detective and send calibration information via email.

Use Airwave on your mobile device to connect remotely to the Flow Detective and send calibration information via email.



Airwave allows you to connect to both the Flow Detective and Apex2 pumps simultaneously

#### Head Office:

Unit 1 / 3 Deakin Street  
(PO Box 5904)  
Brendale QLD 4500 Australia  
Ph: +61 (0) 7 3481 9000

#### Perth Office:

Unit 5 / 30 Enterprise Crescent  
Malaga WA 6090 Australia  
Ph: +61 (0) 8 6184 7840  
[sales@controlequipment.com.au](mailto:sales@controlequipment.com.au)

#### Representatives/Offices in:

Sydney	Melbourne
Hobart	Adelaide
Auckland	Wellington
<a href="http://www.controlequipment.com.au">www.controlequipment.com.au</a>	

## Wide Performance

With the longest battery life on the market, there is peace of mind that it is always ready to go. Within a few seconds of switching on the Flow Detective™ is ready to measure, ensuring you can calibrate devices quickly. With its wide flow range, as well as calibrating dust sampling heads, it can be used to calibrate at low flows for sorbent tube sampling, ensuring you just need one device for all personal air sampling calibration.


- Calibration to within 2% accuracy
- 70 hour battery life
- Flow range from 20mL/min (Plus model) to 5,000mL/min
- Displays standard or actual flow

**“Under the pump standard ISO13137, pumps must have a pulsation level of less than 10%, the Flow Detective™ is the only flowmeter to be able to verify this on any manufacturers pump”**

## Unique Pulsation Detection

As pumps generally use a moving diaphragm, this creates fluctuations in the flow rate on a pump. As sampling heads like cyclones rely on a steady flow to maintain a specific size cut, it is important for pulsation to be as small as possible. The Flow Detective™ displays a red indicator if pulsation is above 10%.

- Displays when pulsation is above 10%
- Helps ensure size selection of sampling heads are accurate

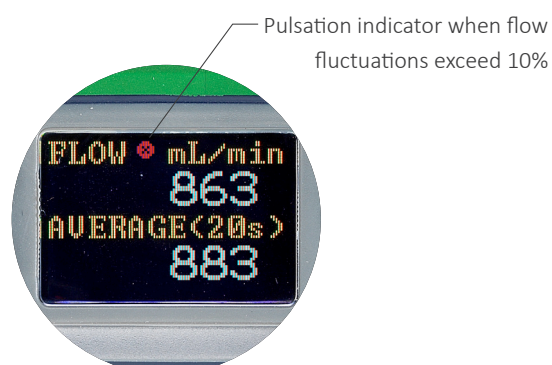

## Bluetooth Connectivity

When calibrating any device, the Airwave App can be used to remotely control the Flow Detective™ and wirelessly receive calibration data. When used with an Apex2 pump, closed loop calibration can be achieved so nothing has to be set manually on the pump, which saves time.

- Receive calibration data to your mobile device
- Halves the time to calibrate Apex2 air sampling pumps



## Send Calibration Data Easily

The Airwave App allows calibration data to be sent from your mobile devices' email client. This allows you to get calibration traceability data quickly, both before taking a sample run with a pump, and after the sampling period to verify flow is within 5%.

- Send calibration data direct to your inbox
- Specify if the result is a calibration or post measurement check
- Includes environmental and optional location data
- Has the ability to add sample information such as the wearer of the pump

**“This will save me lots of time and give me confidence in traceability of my data”**

## Technical Specification

### General:

Flow Range (mL/min):	Normal Range: 500 to 5,000 Low Flow Range: 20 to 500
Accuracy:	< ± 2% from 500 to 5000mL/min ±0.8% of reading ±0.2% FSD from 20mL to 500mL/min
Pulsation Indicator:	Flashes when pulsation is >10%
Flow Modes:	Standard or Actual Flow
Volume Units:	mL/min, L/min, cF/min, cc/min
Temperature Units:	C, F, K
Pressure Units:	kPa, mmHg, "H <sub>2</sub> O, cmH <sub>2</sub> O, mBar, PSI

### Physical:

Display:	Colour OLED
Controls:	4 buttons
Warm Up Time:	<1 second
Dimensions:	112 x 37 x 102 mm (4.41 x 1.46 x 4.02 inches)
Weight:	370g (13oz)

### Environmental:

Temperature:	Operation, 0° to 45°C Storage, -10° to 50°C
Humidity:	30 to 95% RH (non-condensing)
Barometric Pressure:	Auto-correcting


### Electrical:

Battery Type:	Rechargeable Li Ion
Battery Level Indicator:	Yes
Battery Life:	>70 hours
Charge Time:	Typically <6 hours



The Flow Detective™ is available as a kit with a sturdy carry case

## Model Selection

	Standard	Plus
Standard or Actual flow	•	•
Pulsation detection	•	•
Flow rate to 5L/min	•	•
Low flow calibration (<0.5L/min)		•
Bluetooth connectivity®		•
Closed loop calibration with Apex2 pumps		•

## Ordering Information

Part Number	Description
<b>Flowdetective</b>	Standard Flow Detective Instrument
<b>Flowdetectiveplus</b>	Flow Detective Plus Instrument

Each instrument comes complete with protective rubber boot, calibration certificate, 1m tube and field guide.

<b>Flowdetectivekit</b>	Flow Detective Standard kit in hard carry case
<b>Flowdetectivepluskit</b>	Flow Detective Plus kit in hard carry case

Kits include: Flow Detective™, Kit Case, Charger, Calibration adaptor

## Accessories

<b>209152B/KIT</b>	Single Charging Station for the Flow Detective™ inc PSU
<b>213026D</b>	Kit case to hold Flow Detective™, Charger (inc PSU) and Calibration Adaptor
<b>P109028</b>	Calibration adaptor to attach Flow Detective™ to inhalable sampling heads
<b>213018C</b>	Protective Rubber Boot (included with Flow Detective™)
<b>213028B</b>	Desktop stand

### Head Office:

Unit 1 / 3 Deakin Street  
(PO Box 5904)  
Brendale QLD 4500 Australia  
Ph: +61 (0) 7 3481 9000

### Perth Office:

Unit 5 / 30 Enterprise Crescent  
Malaga WA 6090 Australia  
Ph: +61 (0) 8 6184 7840  
[sales@controlequipment.com.au](mailto:sales@controlequipment.com.au)

### Representatives/Offices in:

Sydney Melbourne  
Hobart Adelaide  
Auckland Wellington  
[www.controlequipment.com.au](http://www.controlequipment.com.au)